



PBC Braided Power Shunt – PBC250X300 (564300)



- Ideal for transformer-busduct link
- Undrilled palms can be customize by power press to fit customer specific designs
- Extra flexible power connection and good resistance to vibration

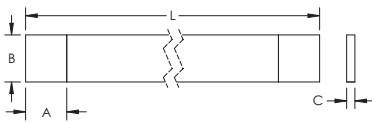

Part Number	PBC250X300
Article Number	564300
Material	Copper
Finish	Tinned
Wire Diameter	0.15 mm
Cross Section	250 mm ²
ΔT 30 K	651 A
ΔT 50 K	863 A
Length (L)	300 mm
A	85 mm
B	50 mm
C	10.5 mm
2 Bar Current Coefficient	1.72
Unit Weight	1.03 kg
Certifications	EAC 7413000009 (Russian Federation) RoHS
Standard Packaging Quantity	2 pc
UPC	78285687820
EAN-13	3479775643007

When used in parallel, the two shunts must be spaced with a minimum distance equal to the thickness of the shunt to allow air cooling.

WARNING

Pentair products shall be installed and used only as indicated in Pentair's product instruction sheets and training materials. Instruction sheets are available at erico.pentair.com and from your Pentair customer service representative. Improper installation, misuse, misapplication or other failure to completely follow Pentair's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2016 Pentair All rights reserved

Pentair, CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH and LENTON are owned by Pentair or its global affiliates.

All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.